


Overview

PHOTOMOS RELAYS



What makes PhotoMOS[®] relays so successful?

Modern semiconductor technology enables fast, quiet, bounce-free switching, even in miniature sizes. PhotoMOS relays nevertheless enjoy an almost unlimited lifetime if used according to the specifications. Moreover, they are extremely reliable, unaffected by vibrations, and their ON-resistance remains stable throughout their entire lifetime.

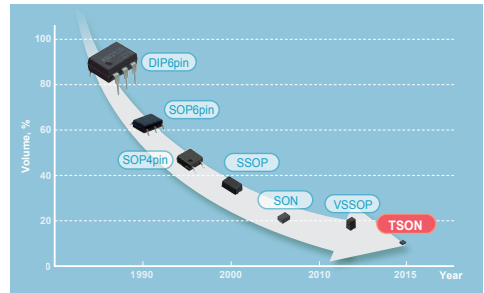


Package size change


PhotoMOS[®] technology

The basic construction of the PhotoMOS relay can be seen in the illustration. Light emitted from an LED on the input side passes through an isolator permeable to light and is detected by a solar cell. Via a trigger circuit, the solar cell's output voltage controls the gates of two

source-coupled MOSFETs at the output. This arrangement allows PhotoMOS relays to switch both AC and DC loads. The integration of MOSFET technology in PhotoMOS relays differentiates them significantly from semiconductor relays with triacs or transistors at the output.

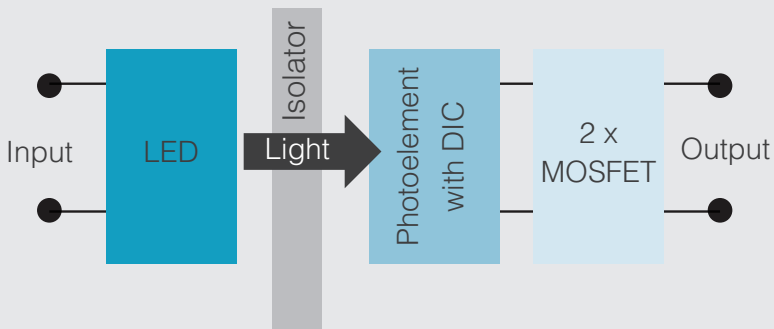

PACKAGE VARIATIONS

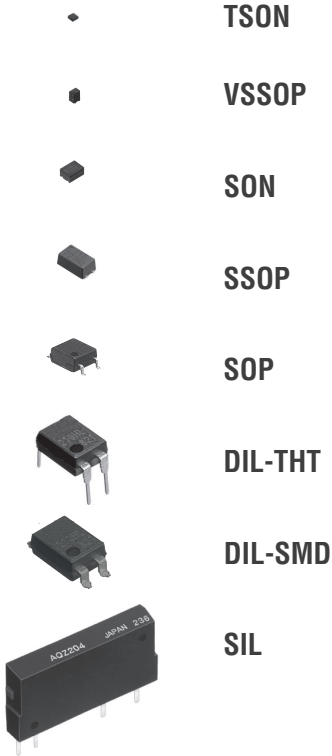

NEW

The right PhotoMOS relay for all APPLICATIONS.

Three different search functions help you find the right PhotoMOS relay within seconds!

Get an overview of the wide range of products with this APP.

Scan QR code directly with a QR code reader on your smartphone

GET IT ON Google Play

Download on the App Store


The most important advantages at a glance

- › Linear output characteristics
- › No threshold voltage
- › Low operate current (sensitive type $\leq 0.31\text{mA}$)
- › Low output capacitance (RF type $\leq 1\text{pF}$)
- › Absolute minimum leakage current (pA)
- › Extremely long lifetime
- › Stable ON-resistance over the entire lifetime
- › Extremely compact design (TSON, VSSOP, SON, SSOP)
- › No contact bounce
- › Highly resistant to shock and vibration
- › Flexible mounting orientation

A FEW DISTINGUISHING FEATURES


1. Linear output characteristics

(e.g. AQY225R2V)

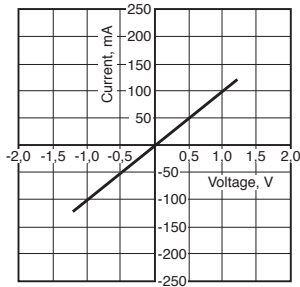


2. Low off-state leakage current

in the pA range (e.g. AQY21*S)

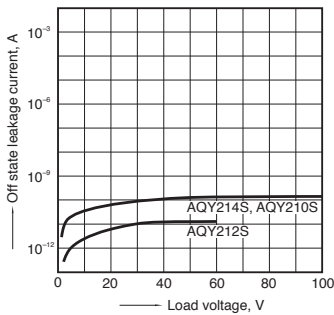


3. Fast switching times

with little variation (e.g. AQY221N3V)



4. Low output capacitance



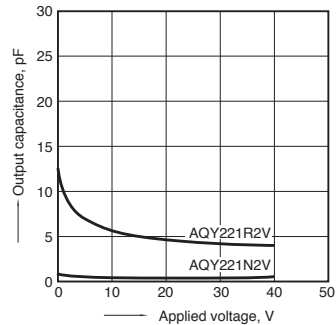


(e.g. AQY221*V)



Typical applications

- › Measuring devices and technology
- › IC and PC board testers
- › Multiplexers
- › Medical technology
- › Industrial control systems
- › Battery management
- › Signal/alarm contacts
- › Outputs for programmable controllers
- › Pulse and counter outputs
- › Isolation monitoring

POPULAR TYPE SELECTION TABLE

	Type ¹⁾	Package	Contact	Voltage (V) ²⁾	Current (A) ²⁾	R _{on} ³⁾ (Ω)	C _{out} ³⁾ (pF)	Info
	AQY212EH(A)	DIP4	1a	60	0.55	0.85	80	General use
	AQY212GH(A)				1.1	0.34	220	
	AQY210EH(A)			350	0.13	18	45	
	AQY214EH(A)			400	0.12	26	45	
	AQY216EH(A)			600	0.05	52	35	
	AQY212S	SOP4	1a	60	0.5	0.83	80	
	AQY212GS				1.0	0.34	220	
	AQY210S			350	0.12	17	45	
	AQY214S			400	0.1	25	45	
	AQY412S	SOP4	1b	60	0.5	1	450	
	AQY410S				350	0.12	18	110
	AQY414S			400	0.1	26	100	
	AQY232S			1a	60	0.5	0.85	80
	AQY230S				350	0.12	19	45
AQY234S	400	0.1	27		45			
	AQV112KL(A)	DIP6	1a	60	0.5	0.55	300	Short circuit protected
	AQY210KS	SOP4		350	0.12	23	42	
	AQV251G	DIP6	1a	30	3.5	0.035	350	High power
	AQV252G2S	SOP6		50	3	0.04	360	
	AQV252G	DIP6		60	2.5	0.08	240	
	AQV255GS	SOP6		80	1.25	0.09	300	
	AQV259H(A)	DIP6		1.000	0.03	85	80	
	AQV258H(A)	DIP6		1.500	0.02	345	80	
	AQY2C1R6P	TSOP	1a	30	0.75	0.22	40	Low CxR for high frequencies
	AQY2C1R2P			40	0.3	0.9	14.5	
	AQY2C2R2P			60	0.3	1.0	27	
	AQY221N3T	VSSOP	1a	25	0.15	5.5	1.1	
	AQY221N2T			40	0.12	9.5	1.1	
	AQY222R2T			60	0.4	0.8	27	
	AQY225R3T			100	0.12	8.8	5.8	
	AQY221N3M	SON	1a	25	0.15	5.5	1.1	
	AQY221N2M			40	0.12	9.5	1.1	
	AQY221R2M			40	0.25	0.8	14	
	AQY221N2V	SSOP	1a	40	0.12	9.5	1	
	AQY221R2V			40	0.25	0.75	12.5	
	AQY221R4V			40	0.5	0.55	24	
	AQY225R2V			80	0.12	10.5	4.5	
	AQY225R3V			100	0.12	8.8	5.8	
	AQZ202	SIL	1a	60	3.0	0.11	1400	AC and DC
	AQZ205			100	2.0	0.23	1400	
	AQZ204			400	0.5	2	600	
	AQZ404		1b	400	0.5	2.8	2000	

1) A = SMD type, 2) Maximum values (DC or peak AC), 3) Typical value



North America

Europe

Asia Pacific

China

Japan

Panasonic Electric Works

Please contact our Global Sales Companies in:

Europe		
▶ Headquarters	Panasonic Electric Works Europe AG	Caroline- Herschel- Straße 100, 85521 Ottobrunn, Tel. +49 89 45354-1000, Fax +49 89 45354-2111, www.panasonic-electric-works.com
▶ Austria	Panasonic Electric Works Austria GmbH	Administrative centre PLATINIUM, Veveří 3163/111, 616 00 Brno, Tel. +43 (0) 2236-26846, Fax +43 (0) 2236-46133 www.panasonic-electric-works.at
	Panasonic Industrial Devices Materials Europe GmbH	Ennsstadenstraße 30, 4470 Enns, Tel. +43 (0) 7223 883, Fax +43 (0) 7223 88333, www.panasonic-electronic-materials.com
▶ Benelux	Panasonic Electric Works Sales Western Europe B.V.	De Rijn 4, (Postbus 211), 5684 PJ Best, (5680 AE Best), Netherlands, Tel. +31 (0) 499 372727, Fax +31 (0) 499 372185, www.panasonic-electric-works.nl
▶ Czech Republic	Panasonic Electric Works Europe AG, organizační složka	Administrative centre PLATINIUM, Veveří 3163/111, 616 00 Brno, Tel. +420 541 217 001, Fax +420 541 217 101, www.panasonic-electric-works.cz
▶ France	Panasonic Electric Works Sales Western Europe B.V.	Succursale française, 10, rue des petits ruisseaux, 91370 Verrières Le Buisson, Tél. +33 (0) 1 6013 5757, Fax +33 (0) 1 6013 5755, www.panasonic-electric-works.fr
▶ Germany	Panasonic Electric Works Europe AG	Caroline- Herschel- Straße 100, 85521 Ottobrunn, Tel. +49 89 45354-1000, Fax +49 89 45354-2111, www.panasonic-electric-works.de
▶ Hungary	Panasonic Electric Works Europe AG	Magyarországi Kézvelten Kereskedelmi Képviselet, 1117 Budapest, Neumann János u. 1., Tel. +43 2236 26846-25, Mobile: +36 20 264 9896, Fax +43 2236 46133, www.panasonic-electric-works.hu
▶ Ireland	Panasonic Electric Works UK Ltd.	Irish Branch Office, Dublin, Tel. +353 (0) 14600969, Fax +353 (0) 14601131, www.panasonic-electric-works.co.uk
▶ Italy	Panasonic Electric Works Italia srl	Via del Commercio 3-5 (Z.I. Ferlina), 37012 Bussolengo (VR), Tel. +39 0456752711, Fax +39 0456700444, www.panasonic-electric-works.it
▶ Nordic Countries	Panasonic Electric Works Europe AG Panasonic Eco Solutions Nordic AB	Filial Nordic, Knarrarnäsgratan 15, 164 40 Kista, Sweden, Tel. +46 859476680, Fax +46 859476690, www.panasonic-electric-works.se
▶ Poland	Panasonic Electric Works Polska sp. z o.o	Jungmansgatan 12, 21119 Malmö, Tel. +46 40 697 7000, Fax +46 40 697 7099, www.panasonic-fire-security.com
▶ Spain	Panasonic Electric Works España S.A.	Włotowska 9A, 02-583 Warszawa, Tel. +48 22 338-11-33, Fax +48 22 338-12-00, www.panasonic-electric-works.pl
▶ Switzerland	Panasonic Electric Works Schweiz AG	Barajas Park, San Severo 20, 28042 Madrid, Tel. +34 913293875, Fax +34 913292976, www.panasonic-electric-works.es
▶ United Kingdom	Panasonic Electric Works UK Ltd.	Grundstrasse 8, 6343 Rotkreuz, Tel. +41 (0) 41 7997050, Fax +41 (0) 41 7997055, www.panasonic-electric-works.ch
		Sunrise Parkway, Linford Wood, Milton Keynes, MK14 6LF, Tel. +44 (0) 1908 231555, Fax +44 (0) 1908 231599, www.panasonic-electric-works.co.uk
North & South America		
▶ USA	Panasonic Industrial Devices Sales Company of America	Two Riverfront Plaza, 7th Floor, Newark, NJ 07102-5490, Tel. 1-8003-442-112, www.pewa.panasonic.com
Asia Pacific/China/Japan		
▶ China	Panasonic Electric Works Sales (China) Co. Ltd.	Tower C 3rd Floor, Office Park, NO.5 Jinghua South Street, Chaoyang District, Beijing 100020, Tel. +86-10-5925-5988, Fax +86-10-5925-5980
▶ Hong Kong	Panasonic Industrial Devices Sales (HK) Co., Ltd.	Suite 301, 3/F, Chinachem Golden Plaza, 77 Mody Road, TST East, Kowloon, Hong Kong, Tel. +852-2529-3956, Fax +852-2528-6991
▶ Japan	Panasonic Corporation	1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501, Japan, Tel. +81-6-6908-1121, www.panasonic.net
▶ Singapore	Panasonic Industrial Devices Automation Controls Sales Asia Pacific	No.3 Bedok South Road, Singapore 469269, Tel. +65-6299-9181, Fax +65-6390-3953